




Booth Trailer Parak

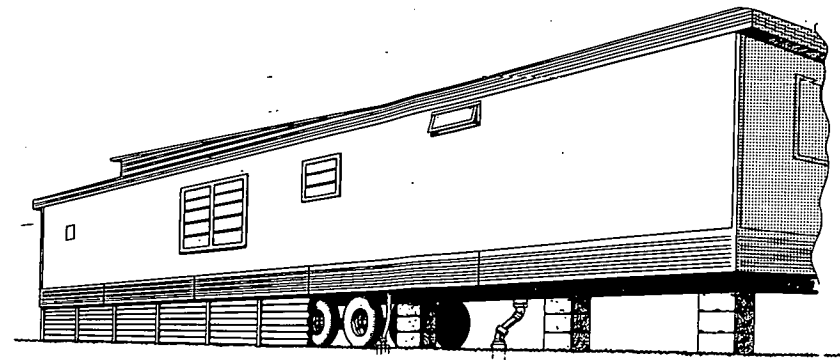


- A NON-FREEZING WALL HYDRANT
- B MAIN SHUT-OFF VALVE
- C WATER CONNECTION (3/4" COPPER TUBING)
- D WATER RISER PIPE (SEE DETAILS)
- E MOBILE HOME DRAIN OUTLET
- F SEWER CONNECTIONS (SEE DETAIL)
- G SEWER RISER PIPE (SEE DETAIL)

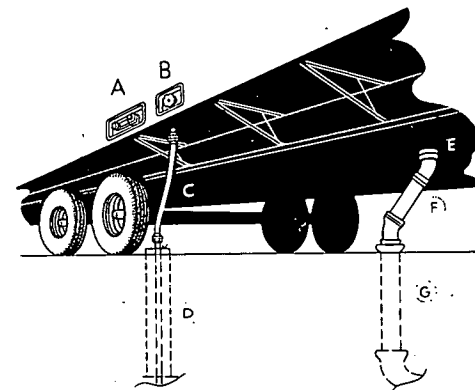


TYPICAL PIPE CONNECTIONS TO MOBILE HOMES

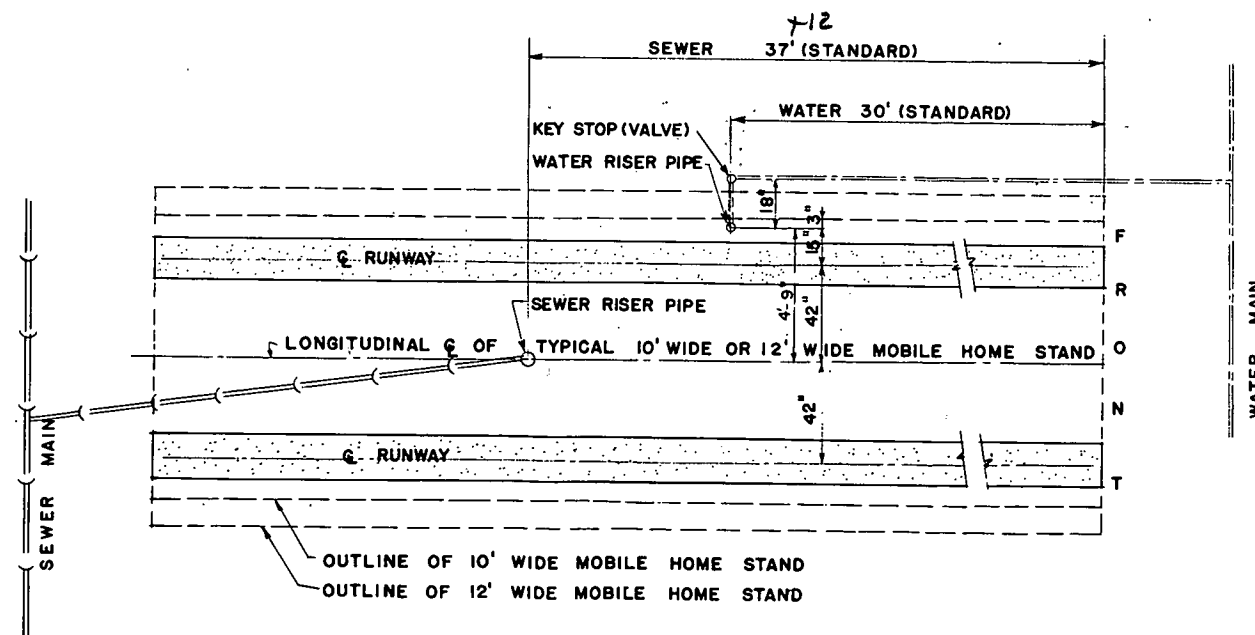

LOCATION OF WATER & SEWER RISER PIPES

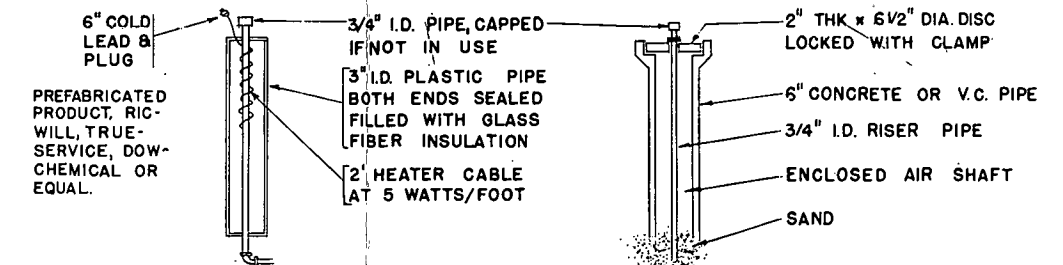


TYPE A TYPE B DETAIL OF WATER RISER PIPE

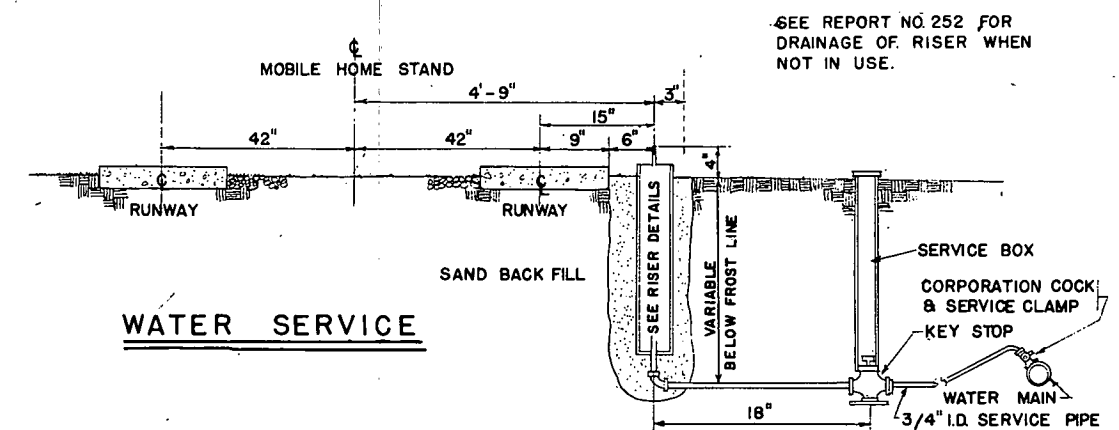

WATER SERVICE


FOR UNOCCUPIED LOT
CLOSE RISER E WITH
RUBBER SEWER RING
D & TIGHTEN WITH
BOLT & PLATES

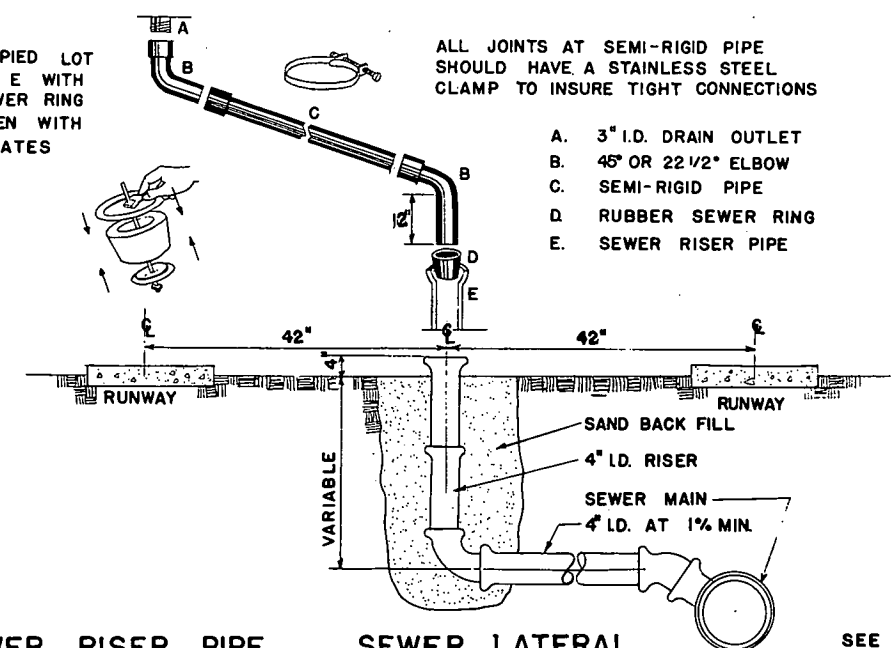

SEWER RISER PIPE, SEWER LATERAL AND SEWER CONNECTION DETAIL

SEE REPORT NO. 252

STATE OF INDIANA



INDIANAPOLIS

STATE BOARD OF HEALTH

Address Reply to:
Indiana State Board of Health
1330 West Michigan Street
Indianapolis, Indiana 46207

August 20, 1965

Mrs. Nora Booth
1717 West 8th Street
Bloomington, Indiana

Dear Mrs. Booth:

Re: Approval of Plans and Specifications
for Booth Mobile Home Park, West 8th
and Spring Street, Bloomington,
Monroe County

You are hereby notified that the State Board of Health has this 20th day of August, 1965, approved the plans and specifications for the construction of the above mobile home park to contain space and facilities for thirty-two independent mobile homes.

This approval is given with the following conditions:

1. That the sewer and water connections comply with the City of Bloomington's specifications.
2. That all necessary permits, including zoning, be obtained.
3. That the shutoff valve in the water service line of each mobile home site shall not be a stop and waste valve.
4. That the water connection and sewer connection on each lot shall be at least 5 feet apart.
5. That water lines and sewer lines shall be at least 10 feet apart.
6. That if nuisance conditions are created, immediate corrective action will be taken by the owner.

7. That the State Board of Health be notified in time to make all necessary inspections.

These plans and specifications were prepared by John Stapleton, P.E., and submitted on June 17 and August 13, 1965.

This approval shall be void if construction is not begun before September 1, 1966.

Very truly yours,



Robert W. Heider, Director
Division of Sanitary Engineering

CHC/pag

Approval No. G.S. 780

cc: John Stapleton, P.E.✓


Monroe County Health Department

Monroe County Plan Commission

Mr. Ray Long, City Engineer

Chester H. Canham

STATE OF INDIANA



INDIANAPOLIS

STATE BOARD OF HEALTH

Address Reply to:
Indiana State Board of Health
1330 West Michigan Street
Indianapolis, Indiana 46207

August 4, 1965

Mr. John Stapleton, P.E.
107½ N. College Avenue
Bloomington, Indiana

Dear Mr. Stapleton:

Re: Proposed Booth Mobile Home Park
West 8th Street & Spring Street
Bloomington, Monroe County

We have reviewed plans you submitted for the proposed Booth Mobile Home Park to be located at West 8th Street and Spring Street, Bloomington.

The following are items which need clarification or additional details before we can complete our review:

1. Materials used for streets is not specified. Sufficient explanation is necessary to indicate how streets will be maintained so as to be dust proof (Section 21 of Mobile Home Park Law). ✓
2. A description of auto parking is necessary. (Section 21 of Mobile Home Park Law). ✓
3. The detail of the water service connections is incomplete. The water service should extend at least 4 inches above the ground surface. (Section 26 of Regulation HSE 21). ✓
4. The location of the water service connection and sanitary sewer connection on a typical lot should be shown on plans. The end lots and odd shaped lots should also be shown. These connections must be at least 5 feet apart. (Section 27 of HSE 21). ✓


Mr. John Stapleton, P.E.

August 4, 1965

5. Details should be shown of a typical sewer connection.
6. The plan for storage and disposal of garbage and refuse shown be outlined. (Section 37-43 of Regulation HSE 21).



As soon as we receive your revisions we can finish our review of this project.

Very truly yours,



Chester H. Canham
Sanitary Engineer
Central Area

CHC/zmg

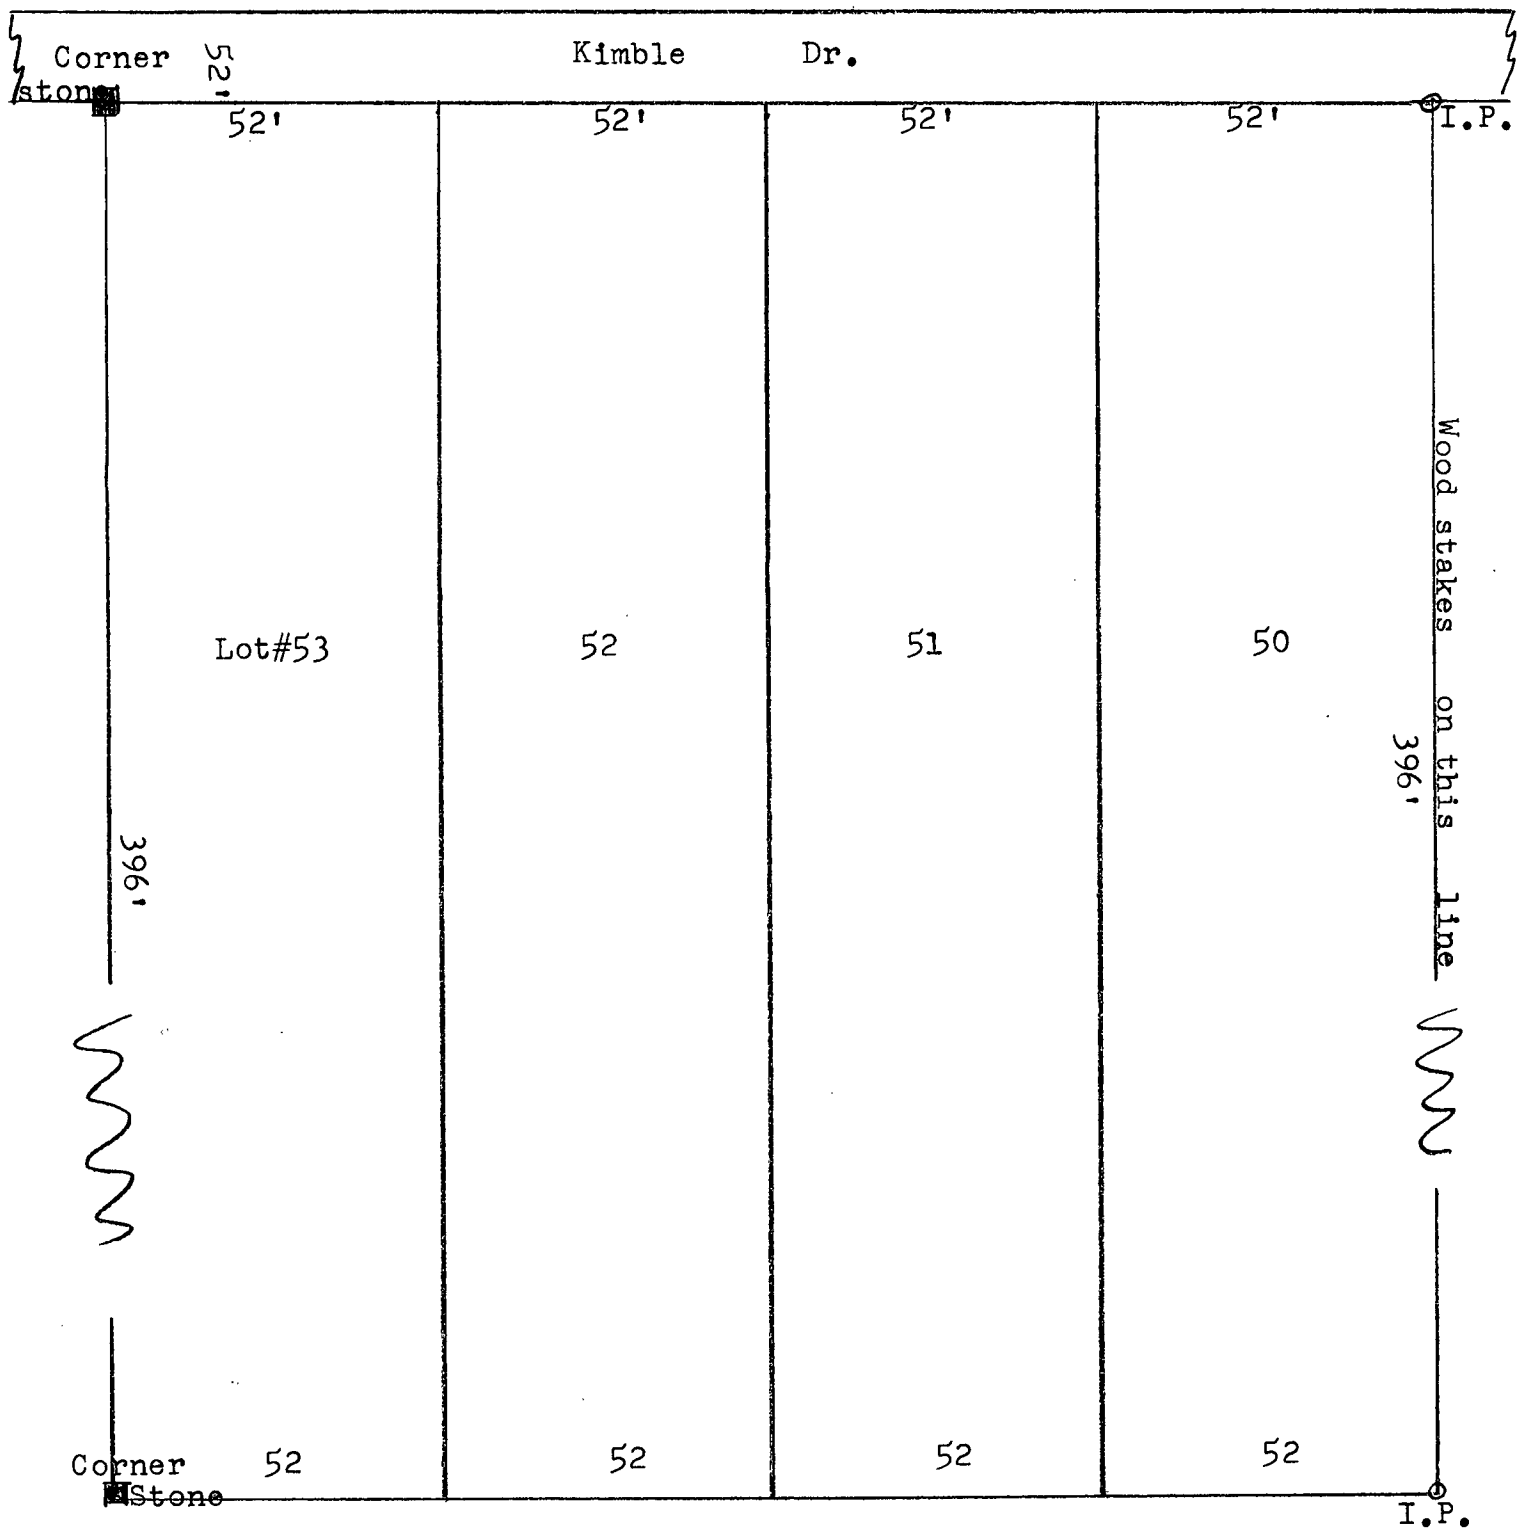

May 9, 1966

Survey of lots 50, 51, 52 and 53 in Johnson Addition, Monroe County, Indiana.

John T. Stapleton
 Civil Engineer & Land Surveyor